

Installation Instructions


uridan[®] non water Partition Wall.

uridan[®] partition wall is mounted with 2 brackets by using 2 x 2pcs. 8 x 75 mm screws.

The lower edge of the partition wall should be positioned level with the lower edge of the urinal.

The usual distance between two urinals is 600 mm, thus uridan[®] partition wall should be installed in the middle between two urinals.

After mounting, apply silicon sealant around outer edge to wall.

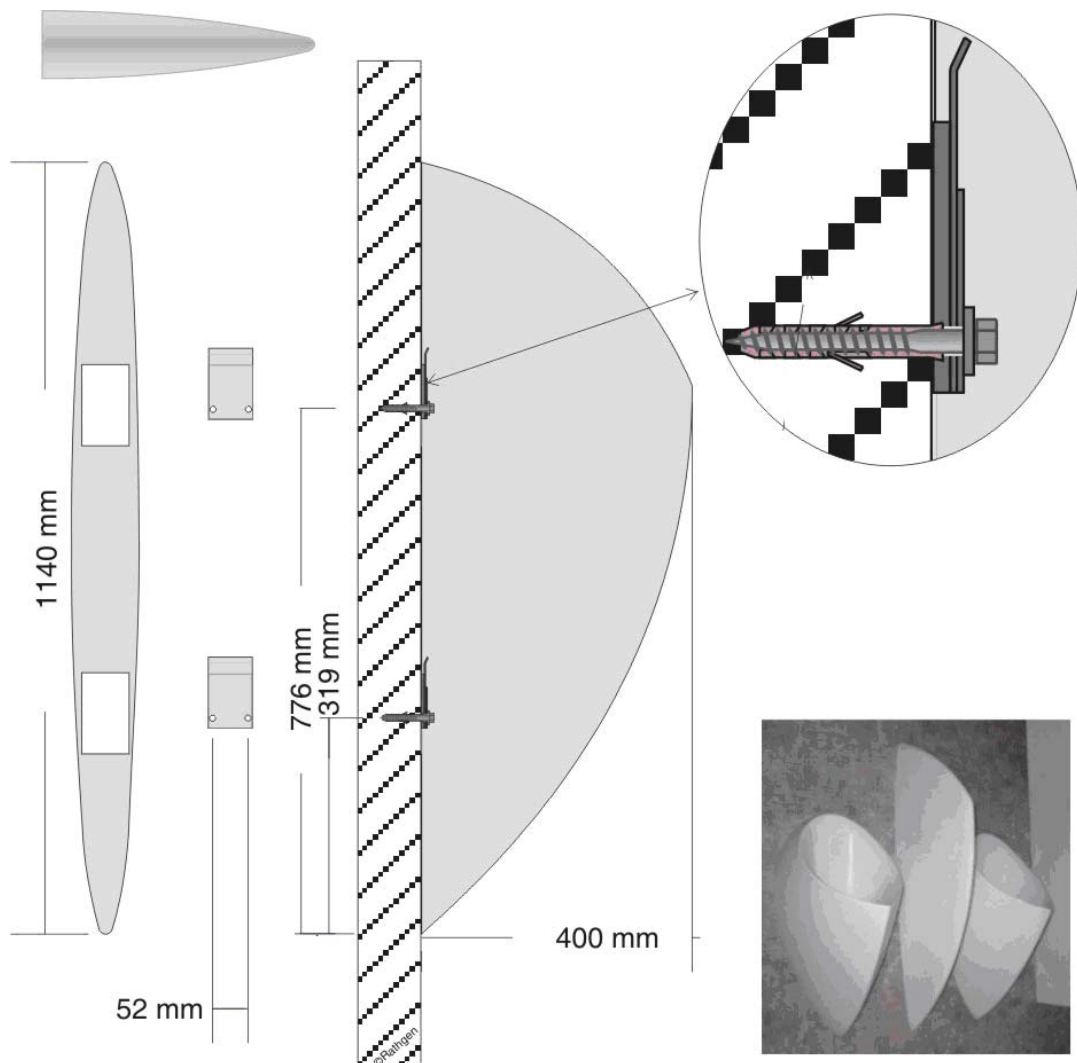

2 brackets + 4pcs. 8 x 75 mm screws are provided.